

OAK CIRRUS



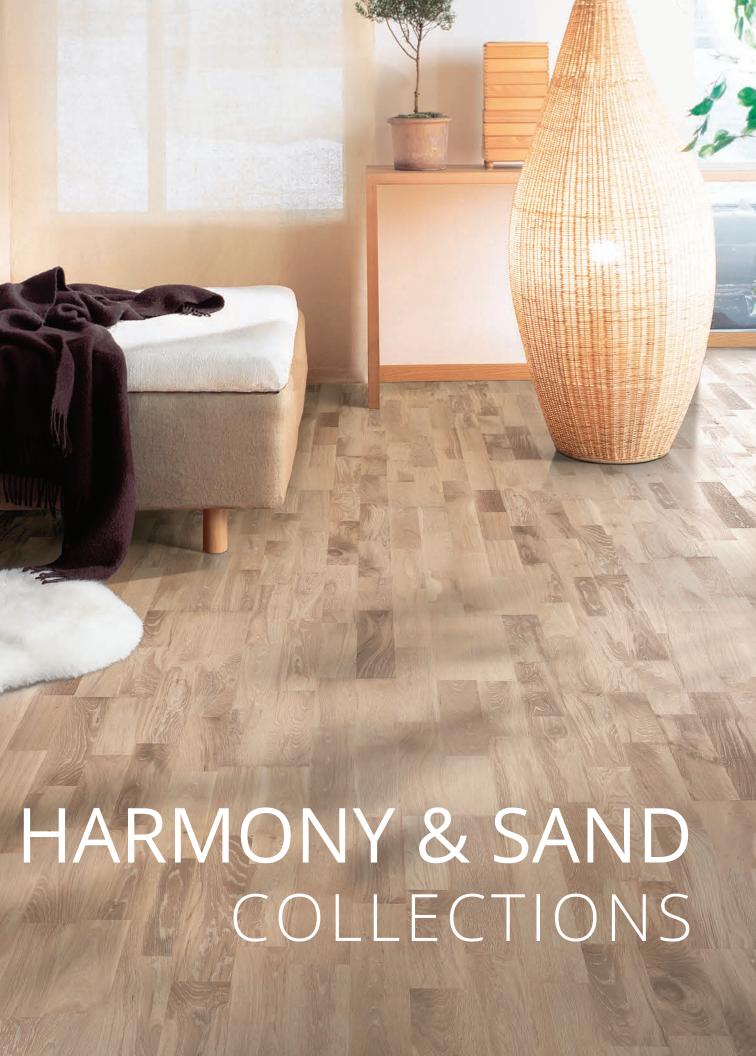

HARMONY & SAND COLLECTIONS

Harmony: the comfort of home, with its warm, nurturing atmosphere. A place to retreat, awash with mellow tones that calm the body and soul. The subtle, rich tones of Kährs Harmony and Sand Collections are designed to complement all interior styles and to create a sense of well-being.

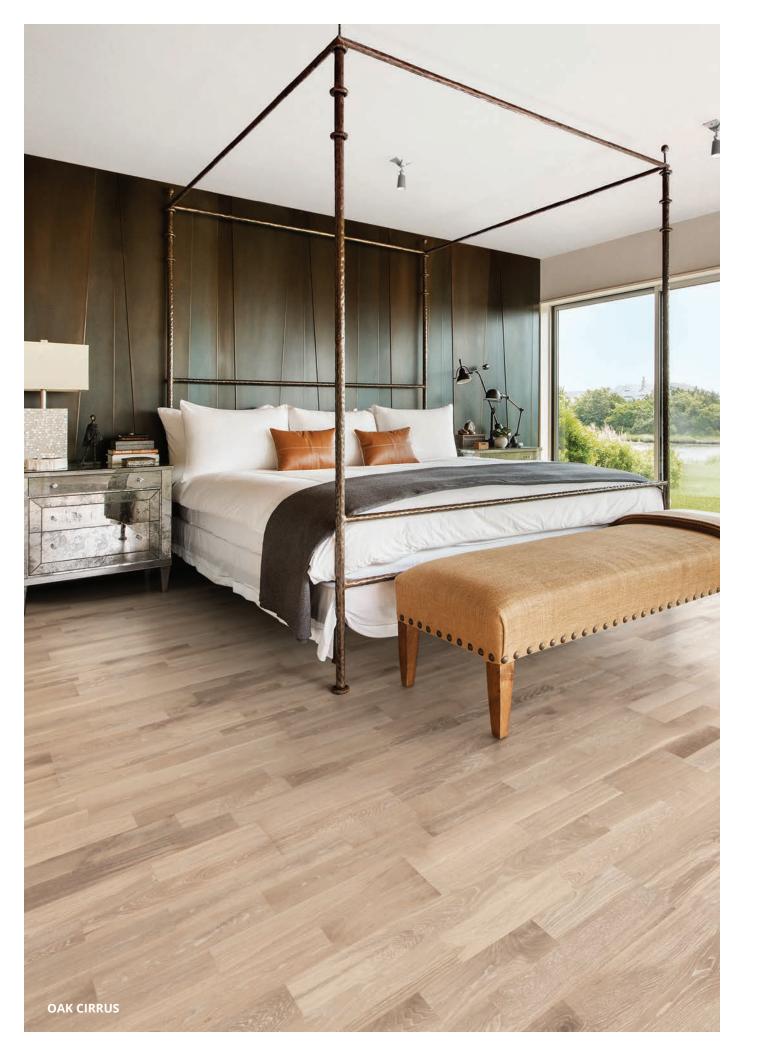

Harmony & Sand Collections



Design:	2-Strip
Features:	Brushed European Oak, Stained, Square Edge
Surface Treatment:	Matte Finish (UV-Cured Acry
Wear Layer:	Approx. 3.5mm (1/8")
Grading:	Variation
Joint:	Woodloc [®] 5S
Joint: Guarantee:	Woodloc® 5S Lifetime Structural 25 Year Wear Through
	Lifetime Structural
Guarantee:	Lifetime Structural 25 Year Wear Through


Length	Width	Thickness	Boards
95 3/8"	7 7/8"	5/8"	6



3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.



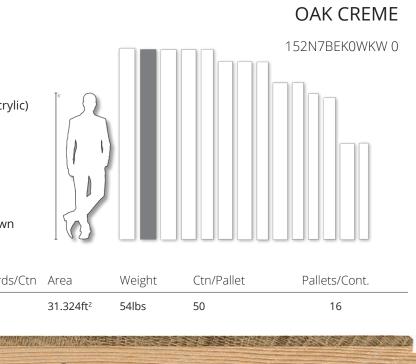

Bottom layer of poplar veneer.



Design:	2-Strip			
Features:	Brushed Europe Lightly Smoked,			
Surface Treatment:	Matte Finish (UV	-Cured Acr		
Wear Layer:	Approx. 3.5mm	(1/8")		
Grading:	Lively			
Joint:	Woodloc [®] 5S			
Guarantee:		Lifetime Structural 25 Year Wear Through		
Installation:	Float, Glue-dowr	n, Nail-dow		
This product may	be floated over radio	ant heat.		
Length Width	n Thickness	Boards/(
95 3/8" 7 7/8"	5/8"	6		
a print with the second s	the second s	AN INCOME THE REAL		


3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.



OAK GRANITE

152N6REKGGKW 0

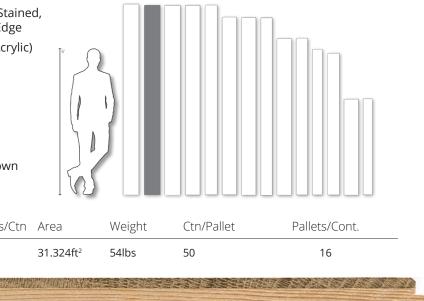

Bottom layer of poplar veneer.

CLICK TO RETURN TO TABLE OF CONTENTS



Desig	n:	2-Strip			
Feature		Brushe		opean	Oak,
		Staine	d, Squa	are Edg	ge
Surface Treatmen	it:	Matte	Finish	(UV-Cu	red Acr
Wear Laye	er:	Approx	k. 3.5m	nm (1/8	3")
Gradin	g:	Lively			
Join	nt:	Woodl	oc® 5S		
Guarante	e:	Lifetim 25 Yea			ıgh
Installatio	n:	Float, (Glue-de	own, N	ail-dow
This product m	nay be	e floated	over ra	ndiant P	neat.
Length	Widt	:h	Thick	ness	Boards
95 3/8"	7 7/8		5/8"		6
	100 Jan 10		No.	Contract of	111111111111111111111111111111111111111
UTA CARTAN SUB CONTROL	Real (PD)	ELANDEAHUA	IN PROPERTY	OT A DECKAR	THE PARTY OF

3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.




OAK CIRRUS

152N2BEKVVKW 0





Bottom layer of poplar veneer.

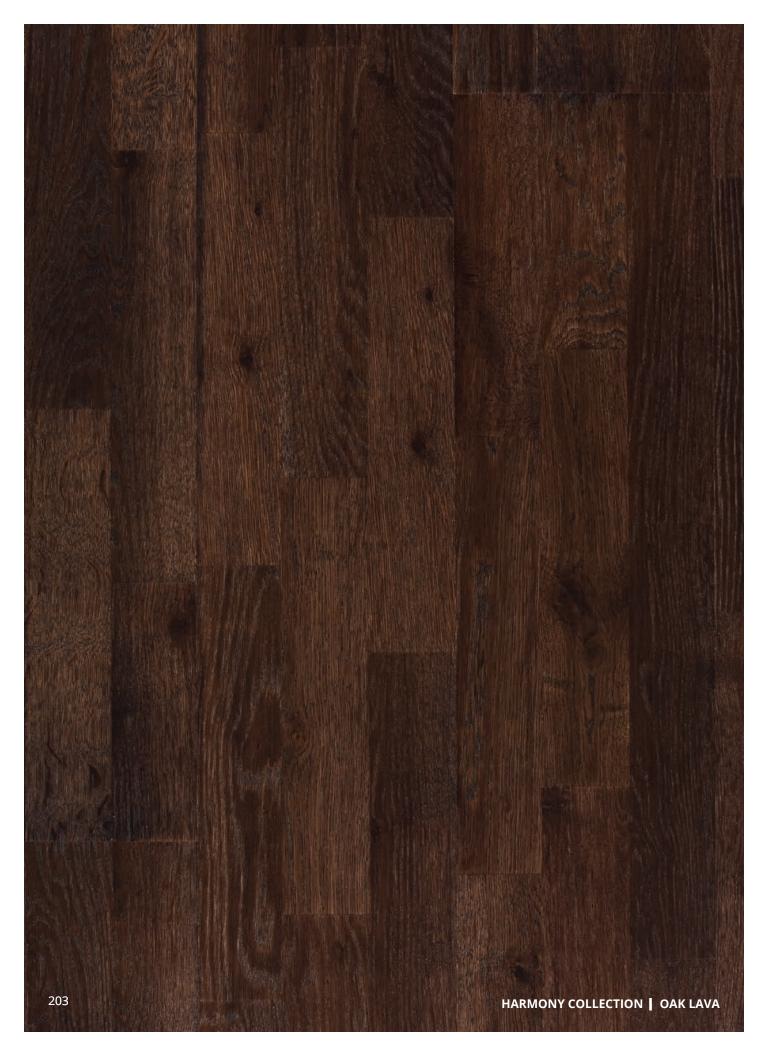

Des	ign:	3-Stri	р	
Features:		Brushed European Oak, Stained, Square Edge		
Surface Treatment:		Matte	e Finish (UV-0	Cured Acry
Wear La	yer:	Appr	ox. 3.5mm (1	/8")
Grad	ing:	Lively	/	
Jo	Joint: Woodloc [®] 5S			
Guarant	antee: Lifetime Structural 25 Year Wear Through			
Installat	ion:	Float,	, Glue-down,	Nail-dowi
This product	may be	e floate	d over radian	t heat.
Length	Width	1	Thickness	Boards/0
95 3/8"	7 7/8"		5/8"	6
		AND INCOME.		2-1-1-1-1-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-



3-Layer Construction:


Surface layer consists of sawn strips. Solid pine fingers.



www.kahrs.com

OAK LAVA

153N6CEK1JKW 0

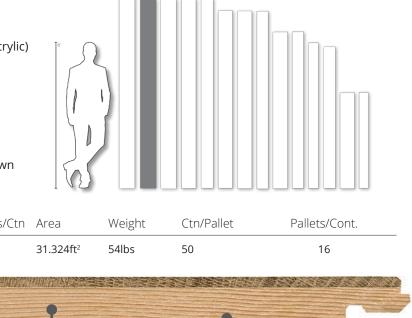

Bottom layer of poplar veneer.




Design:	3-Strip
Features:	Brushed European Oak, Stained, Square Edge
Surface Treatment:	Matte Finish (UV-Cured Acr
Wear Layer:	Approx. 3.5mm (1/8")
Grading:	Lively
Joint:	Woodloc [®] 5S
Guarantee:	Lifetime Structural 25 Year Wear Through
Installation:	Float, Glue-down, Nail-dow
This product may b	e floated over radiant heat.


Length	Width	Thickness	Boards
95 3/8"	7 7/8"	5/8"	6
CONTRACTOR OF			
		and the second second	

3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.





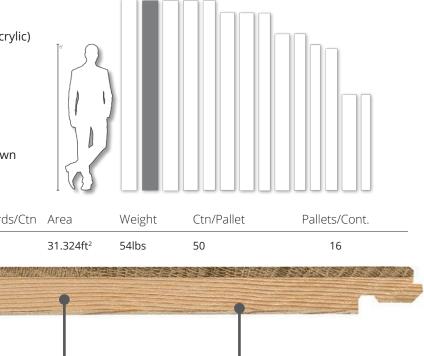

Bottom layer of poplar veneer.

CLICK TO RETURN TO TABLE OF CONTENTS



Design	: 3-Strip	I.	
Features		ed European (d, Square Edg	
Surface Treatment	: Matte	Finish (UV-Cu	red Acr
Wear Layer	: Appro	x. 3.5mm (1/8	")
Grading	g: Variati	on	
Joint	:: Woodl	oc® 5S	
Guarantee	Lifetime Structural 25 Year Wear Throug		gh
Installation	Float,	Glue-down, N	ail-dow
This product me	ay be floatea	over radiant h	eat.
Length	Width	Thickness	Board
95 3/8"	7 7/8"	5/8"	6
	01909-2019-100		


3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.



OAK PALE

153N5BEKP1KW 0

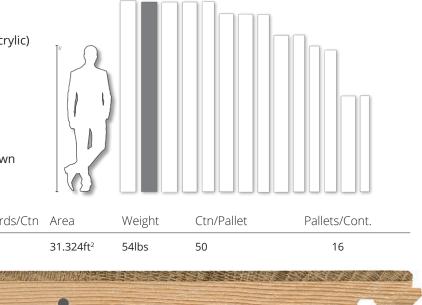

Bottom layer of poplar veneer.




Desigr	n:	3-Strip		
Features		Brushed	d European (, Square Edg	
Surface Treatmen	t:	Matte F	inish (UV-Cu	red Acr
Wear Laye	r:	Approx.	3.5mm (1/8	")
Grading	g:	Lively		
Join	t:	Woodlo	c® 5S	
Guarantee	e:		Structural Wear Throu	gh
Installation	n:	Float, G	lue-down, Na	ail-dow
This product m	iay be	floated c	over radiant h	eat.
Length	Widt	th	Thickness	Board
95 3/8"	7 7/8	3"	5/8"	6
	539 <u>7</u> 59	anen om		
	State State	and the second second	Concession of the Party of the	

3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.



www.kahrs.com

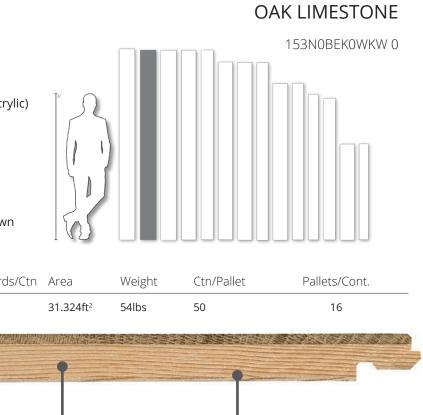


Bottom layer of poplar veneer.



SAND COLLECTION

Design:	2-Strip				
Features:	European Edge, Smo	Oak, Stained, S ooth	Squ		
urface Treatment:	Matte Fini	Matte Finish (UV-Cured Acr			
Wear Layer:	Approx. 3	.5mm (1/8")			
Grading:	Variation				
Joint:	Woodloc®	5S			
Guarantee:	Lifetime Structural 25 Year Wear Through				
Installation:	Float, Glue	e-down, Nail-do	owr		
This product may	be floated ove	er radiant heat.			
Length	Width	Thickness	В		
95 3/8"	7 7/8"	5/8"	6		
With the second second second			制度和		

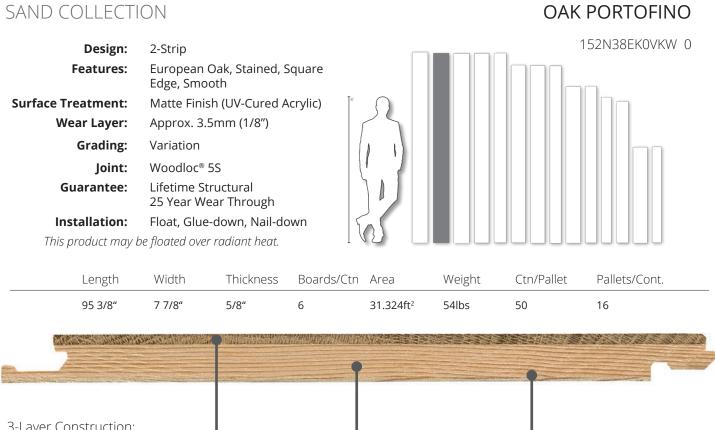

3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.



Bottom layer of poplar veneer.