AMERICAN, EUROPEAN, SCANDINAVIAN, & WORLD NATURALS COLLECTIONS




AMERICAN, EUROPEAN, SCANDINAVIAN & WORLD NATURALS COLLECTIONS

Vigorous, opulent species such as American Walnut, American Cherry, Canadian Maple, Scandinavian Ash, Nordic Beech, European Oak, and Brazilian Cherry as varied as the continents - these collections cover many interior styles.





| Design: | 3-Strip | | | |
|-------------------|---|---------------------|---|--|
| Features: | Smooth Ca Square Edg | anadian Maple ge | , | |
| urface Treatment: | Silk Matte Finish (UV-Cured Acrylic) | | | |
| Wear Layer: | Approx. 3. | 5mm (1/8") | | |
| Grading: | Calm | | | |
| Joint: | Woodloc [®] 5S | | | |
| Guarantee: | Lifetime Structural 25 Year Wear Through | | | |
| Installation: | Float, Glue | -down, Nail-do | w | |
| | | | | |
| Length | Width | Thickness | E | |
| 95 3/8" | 7 7/8" | 5/8" | 6 | |

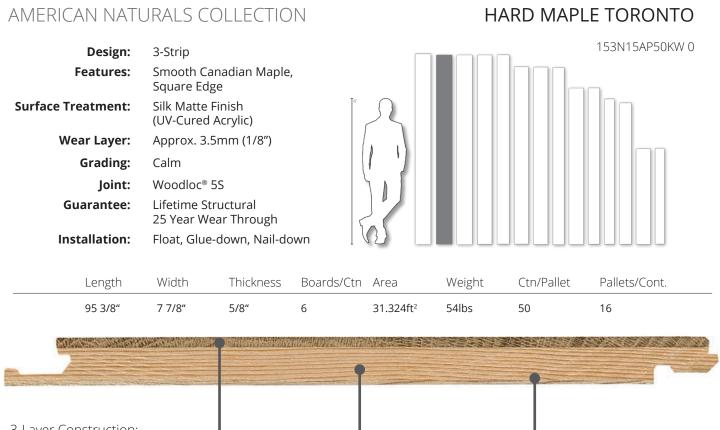

3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.



www.kahrs.com

Bottom layer of poplar veneer.

CLICK TO RETURN TO TABLE OF CONTENTS



AMERICAN NATURALS COLLECTION

| Design: | 3-Strip | | | | |
|--|--|-------------------------------|-------|--|--|
| Features: | Smooth Ame Square Edge | erican Cherry e | ', | | |
| Surface Treatment: | Silk Matte Fi (UV-Cured A | | | | |
| Wear Layer: | Approx. 3.5r | nm (1/8") | | | |
| Grading: | Calm | | | | |
| Joint: | Woodloc [®] 55 | 5 | | | |
| Guarantee: | Lifetime Structural 25 Year Wear Through | | | | |
| Installation: | Float, Glue-c | lown, Nail-do | w | | |
| This product may be floated over radiant heat. | | | | | |
| Length | Width | Thickness | E | | |
| 95 3/8" | 7 7/8" | 5/8" | 6 | | |
| and the second sec | A REAL PROPERTY AND A REAL | H CONTRACTOR AND A CONTRACTOR | 147.0 | | |




3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.




CHERRY SAVANNAH

153N15CH50KW 0

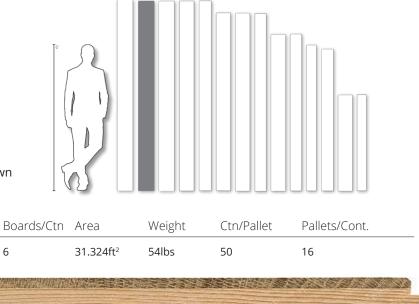


Bottom layer of poplar veneer.

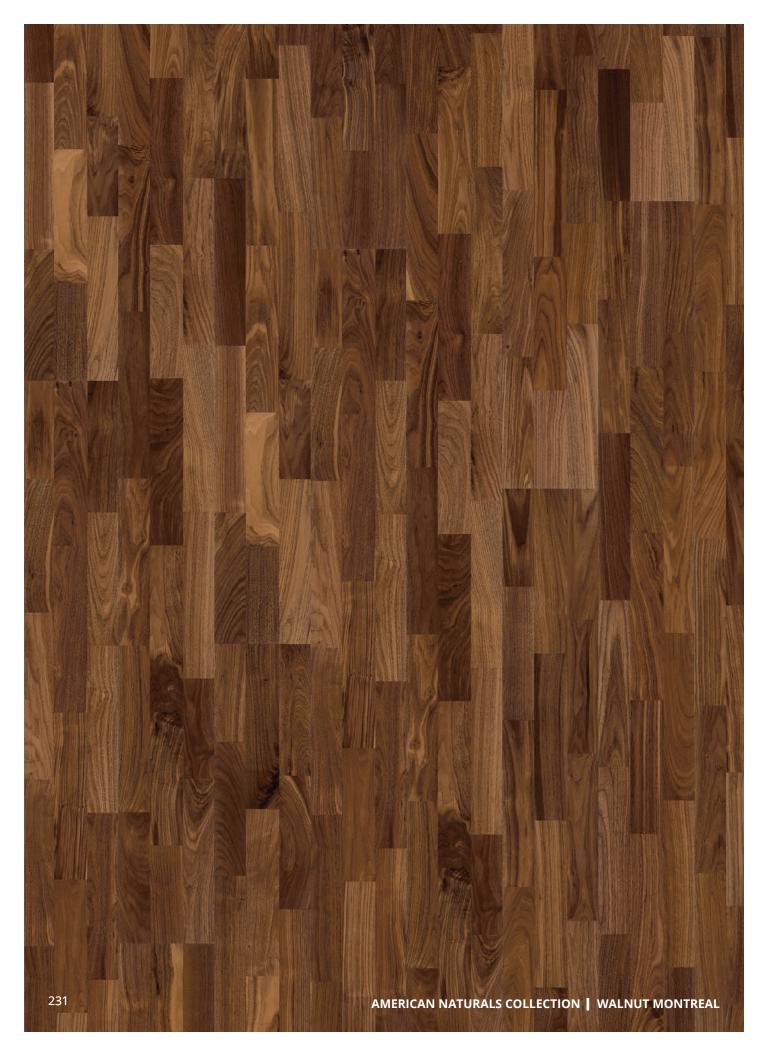

AMERICAN NATURALS COLLECTION

| Design: | 3-Strip | | |
|--------------------|---|--|-------|
| Features: | Smooth Am Square Edge | erican Walnu e | t, |
| ace Treatment: | Silk Matte Finish (UV-Cured Acrylic) | | |
| Wear Layer: | Approx. 3.5r | nm (1/8") | |
| Grading: | Calm | | |
| Joint: | Woodloc [®] 5 | 5 | |
| Guarantee: | Lifetime Stru 25 Year Wea | | |
| Installation: | Float, Glue-o | down, Nail-do | W |
| This product may b | e floated over i | adiant heat. | |
| Length | Width | Thickness | E |
| 95 3/8" | 7 7/8" | 5/8" | 6 |
| | AND A DESCRIPTION OF A | NUMBER OF DESIGNATION OF THE OWNER OWNE | 10214 |



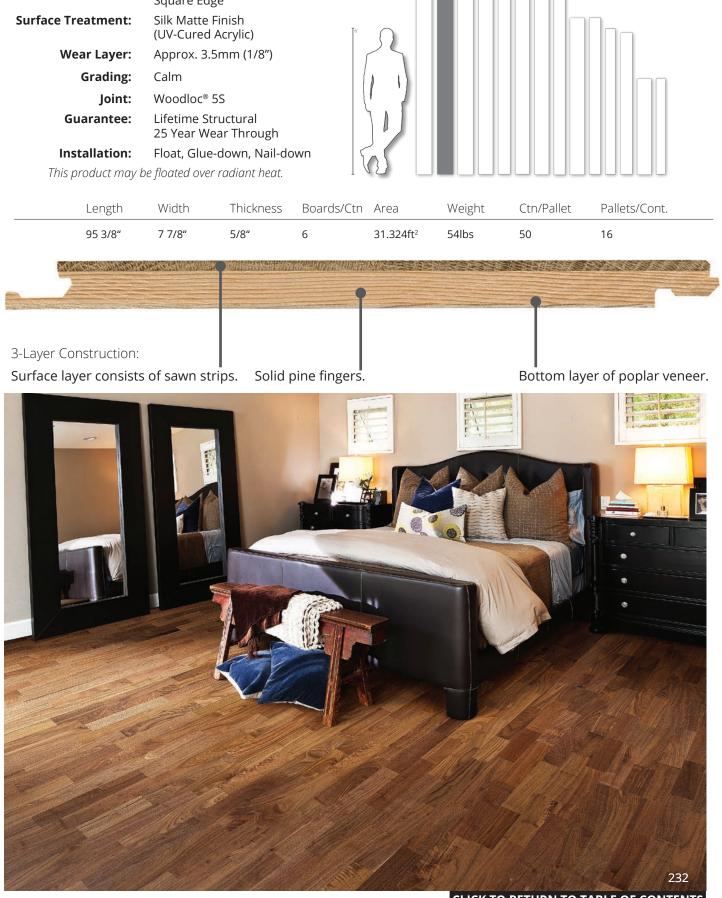

WALNUT MONTREAL

153N15VA50KW 0

CLICK TO RETURN TO TABLE OF CONTENTS



EUROPEAN NATURALS COLLECTION

| Design: | 3-Strip | | | |
|--|---|--------------|----|--|
| Features: | Smooth Whi | te Oak, Squa | re | |
| Surface Treatment: | Silk Matte Finish (UV-Cured Acrylic) | | | |
| Wear Layer: | Approx. 3.5r | nm (1/8") | | |
| Grading: | Variation | | | |
| Joint: | Woodloc [®] 5S | | | |
| Guarantee: | Lifetime Structural 25 Year Wear Through | | | |
| Installation: | Float, Glue-down, Nail-dow | | | |
| This product may be floated over radiant heat. | | | | |
| Length | Width | Thickness | E | |
| 95 3/8" | 7 7/8" | 5/8" | 6 | |



3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.



OAK SIENA



Bottom layer of poplar veneer.



EUROPEAN NATURALS COLLECTION

| e |
|----|
| cr |
| |
| |
| |
| |
| wr |
| |
| |


| Length | Width | Thickness | В |
|--|---------------------|-----------|---|
| 95 3/8" | 7 7/8" | 5/8" | 6 |
| eterse and a second | SPESSION CONTRACTOR | | |
| | | | |
| | | | |

3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.



www.kahrs.com

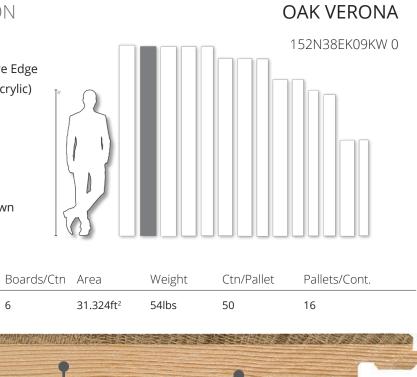

Bottom layer of poplar veneer.

CLICK TO RETURN TO TABLE OF CONTENTS



SCANDINAVIAN NATURALS COLLECTION


| | Design: | Plank | | | | |
|------------|---------------|---|---|------|--|--|
| | Features: | Smooth Scandinavian Ash, Square Edge | | | | |
| Surface T | reatment: | Dime inforced i | Silk Matte Finish (UV-Cured Acrylic) | | | |
| W | ear Layer: | Approx. 3.5 | mm (1/8") | | | |
| | Grading: | Lively | | | | |
| | Joint: | Woodloc [®] 5 | S | | | |
| G | uarantee: | Lifetime Str 25 Year We | | | | |
| Ins | stallation: | Float, Glue- | down, Nail-do | w | | |
| This | product may b | e floated over | radiant heat. | | | |
| | Length | Width | Thickness | E | | |
| Pattern A | 95 1/4" | 7 3/8" | 5/8" | 6 | | |
| 808 | | | | | | |
| | | | | 1.53 | | |
| 3-Layer Co | nstruction: | | | | | |
| | Surface la | yer: sawn pl | ank. | S | | |
| | | A REAL | AP | P. | | |



www.kahrs.com

ASH GOTLAND

151L87AK50KW240

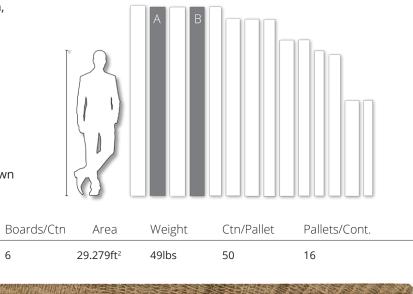



Solid pine fingers.

Bottom layer of poplar veneer.



SCANDINAVIAN NATURALS COLLECTION


| | Design: | 3-Strip | | | | AB | | 153N18BK50KW 0 |
|---------|--|---|--|---|-----------------------|--------|------------|--|
| | Features: | Smooth Sca Square Edge | ndinavian Bee e | ech, | | | | |
| Surfac | e Treatment: | Silk Matte F (UV-Cured A | | | 2 | | | |
| | Wear Layer: | Approx. 3.5 | mm (1/8") | | | | | |
| | Grading: | Variation | | | | | | |
| | Joint: | Woodloc [®] 5 | S | | | | | |
| | Guarantee: Lifetime Structural 25 Year Wear Through | | | | | | | |
| | Installation: | Float, Glue-o | down, Nail-do | wn | | | | |
| | Length | Width | Thickness | Boards/Ctn | Area | Weight | Ctn/Pallet | Pallets/Cont. |
| Pattern | B 95 3/8" | 7 7/8" | 5/8" | 6 | 31.324ft ² | 54lbs | 50 | 16 |
| | the Property of Street, No. | | 1.21年1月1日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日 | | | | | Constant and the second |
| | CONCERNING AND | Market | The second s | AND | | | | A LOUB TO THE POST OF THE REAL OF THE POST |



3-Layer Construction:

Surface layer consists of sawn strips. Solid pine fingers.





153N188K50KW 0



Bottom layer of poplar veneer.

BEECH VIBORG



WORLD COLLECTION

| Design: | 3-Strip | | |
|---------------------|---|---------------|---|
| Features: | Smooth Braz Square Edge | , | |
| Surface Treatment: | Silk Matte Fi (UV-Cured A | | |
| Wear Layer: | Approx. 3.5r | nm (1/8") | |
| Grading: | Calm | | |
| Joint: | Woodloc [®] 55 | 5 | |
| Guarantee: | Lifetime Structural 25 Year Wear Through | | |
| Installation: | Float, Glue-d | lown, Nail-do | w |
| This product may be | e floated over r | adiant heat. | |
| Length | Width | Thickness | I |
| 95 3/8" | 7 7/8" | 5/8" | (|

3-Layer Construction:


Surface layer consists of sawn strips. Solid pine fingers.

CALL AND HEARING AND A STARLEY



BRAZILIAN CHERRY LA PAZ

153N15JO50KW 0

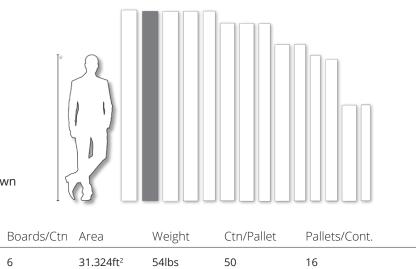



Bottom layer of poplar veneer.