

The Founders Collection pays tribute to the pioneering founding family members behind Kährs. A heavily brushed, handscraped surface, enhanced by a Nature Oil finish, showcases the grain and texture of the wood – reflecting the masters' dedication to preserving the natural beauty and craftsmanship of wood floors.








Design:	Plank	
Features:	Rustic Scandinavian Oak, St Edges, Brushed, Handscrap	
ace Treatment:	Oil	
Wear Layer:	Approx. 3.5mm (1/8")	
Grading:	Dynamic	
Joint:	Woodloc [®] 5S	
Guarantee:	Lifetime Structural	
Installation:	Float, Glue-down, Nail-dow	
This product may be floated over radiant bea		

Length Width

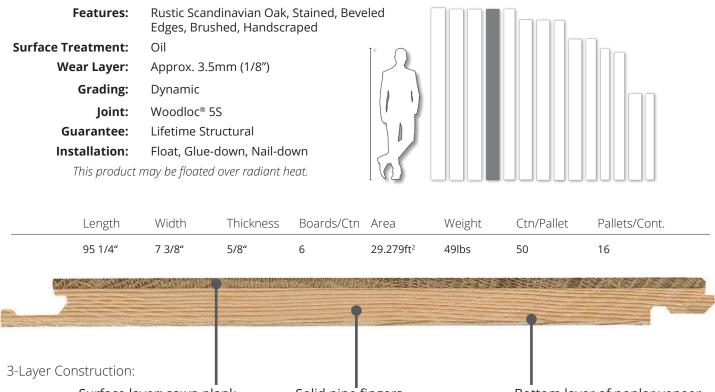

Surface layer: sawn plank.



www.kahrs.com




151N7BEKFVKW240

Solid pine fingers.

Bottom layer of poplar veneer.

This product must be oiled immediately after installation and prior to use.

CLICK TO RETURN TO TABLE OF CONTENTS

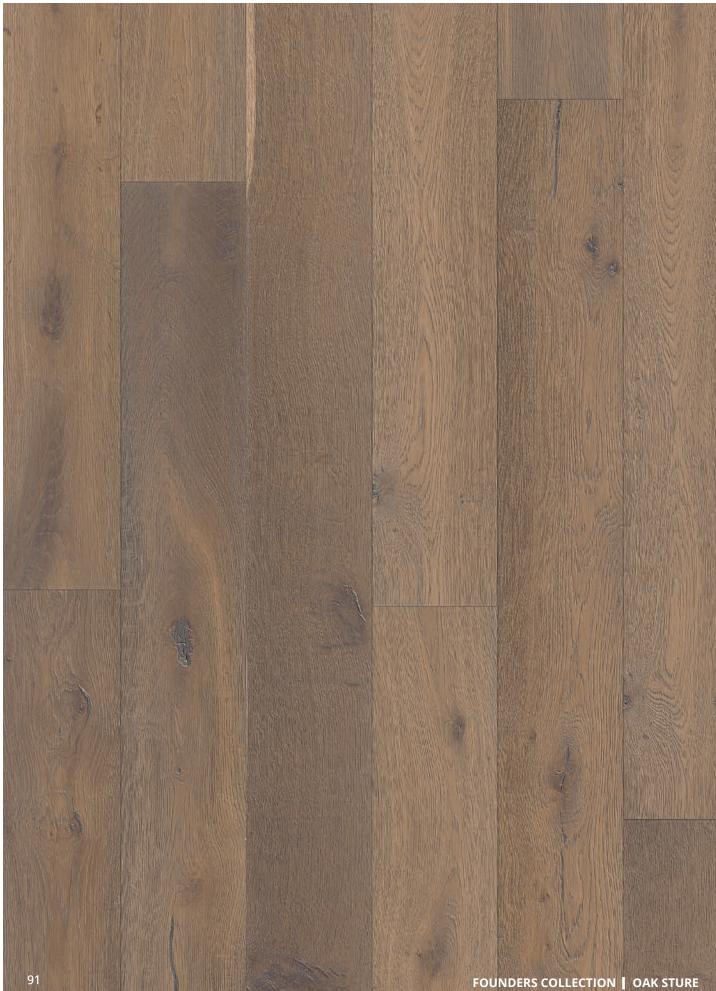

Rustic Scandinavian Oak, S Beveled Edges, Handscrap Brushed, Lightly Smoked				
Approx. 3.5mm (1/8")				
Dynamic				
Woodloc [®] 5S				
Lifetime Structural				
Float, Glue-down, Nail-dow				
This product may be floated over radiant heat				
ness				
*(2:1)220000000000				
NAMES OF A				

3-Layer Construction:

Surface layer: sawn plank.


This product must be oiled immediately after installation and prior to use.



www.kahrs.com

OAK STURE


151N7BEKFMKW240

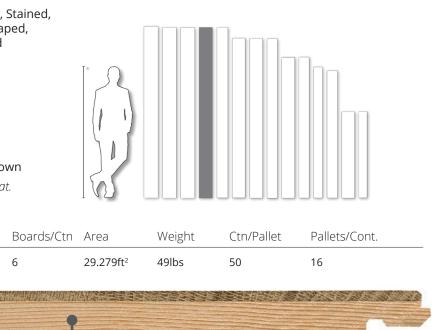


Solid pine fingers.


Bottom layer of poplar veneer.

CLICK TO RETURN TO TABLE OF CONTENTS

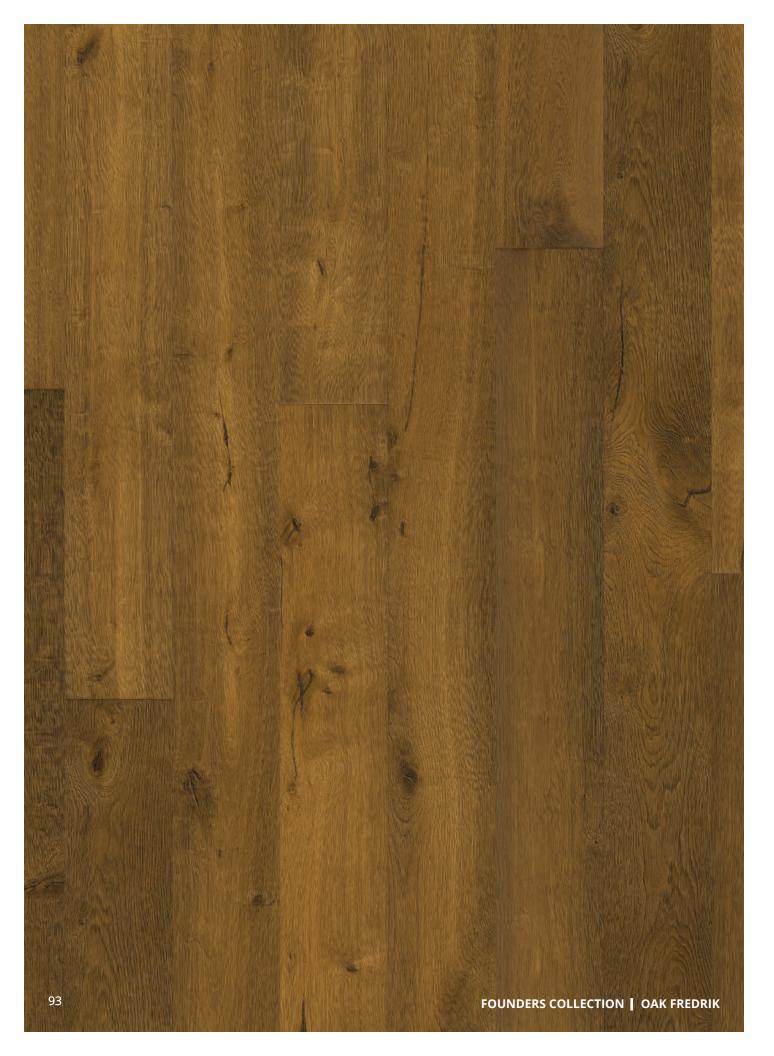

Design:	Plank	
Features:	Rustic Scandinavian Oak, S Beveled Edges, Handscrap Brushed, Smoked	
urface Treatment:	Oil	
Wear Layer:	Approx. 3.5mm (1/8")	
Grading:	Dynamic	
Joint:	Woodloc [®] 5S	
Guarantee:	Lifetime Structural	
Installation:	Float, Glue-down, Nail-dow	
This product may be floated over radiant heat.		

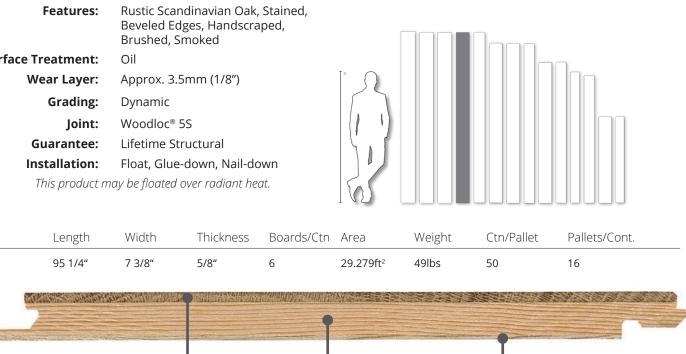

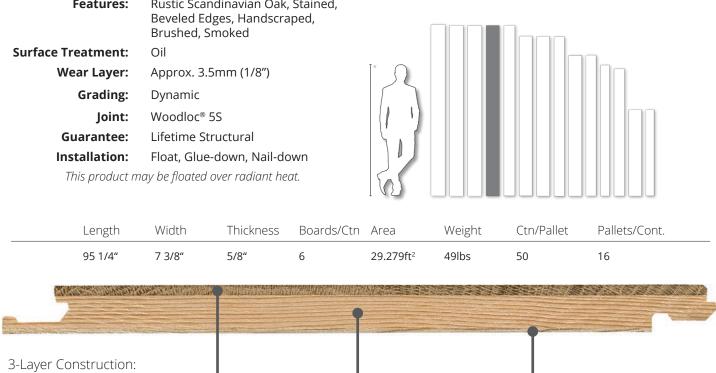

Surface layer: sawn plank.

This product must be oiled immediately after installation and prior to use.



OAK FREDRIK

151N7BEKFCKW240

Solid pine fingers.

Bottom layer of poplar veneer.

CLICK TO RETURN TO TABLE OF CONTENTS



Design:	Plank			
Features:	Rustic Scandinavian Oak, Stained, Beveled Edges, Handscraped, Brushed			
Surface Treatment:	Oil			
Wear Layer:	Approx. 3.5mm (1/8")			
Grading:	Dynamic			
Joint:	Woodloc [®] 5S			
Guarantee:	Lifetime Structural			
Installation:	Float, Glue-down, Nail-dov			
This product may be floated over radiant heat.				
Length	Width	Thickness		
95 1/4"	7 3/8"	5/8"		
3-Layer Construction:				
Surface layer: sawn plank.				








www.kahrs.com

OAK ULF

151N7BEKFBKW240

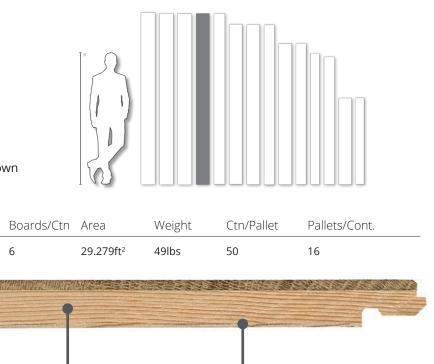

Solid pine fingers.

Bottom layer of poplar veneer.

This product must be oiled immediately after installation and prior to use.